
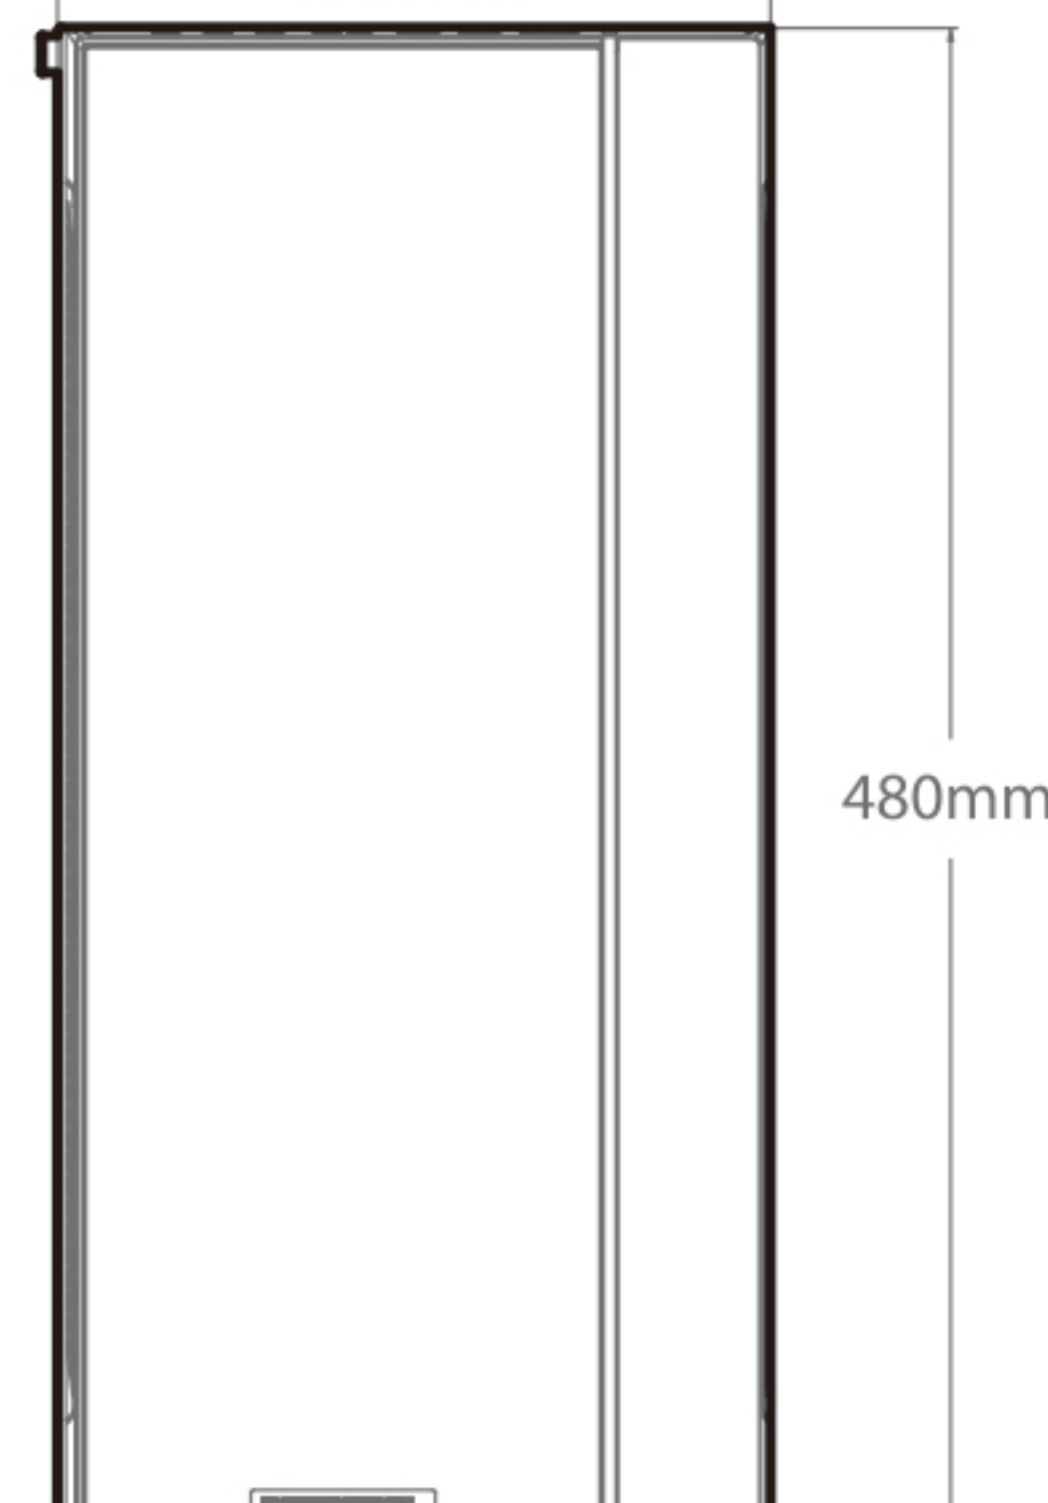


MATREXX 55

USER GUIDE

www.deepcool.com

1. Specifications

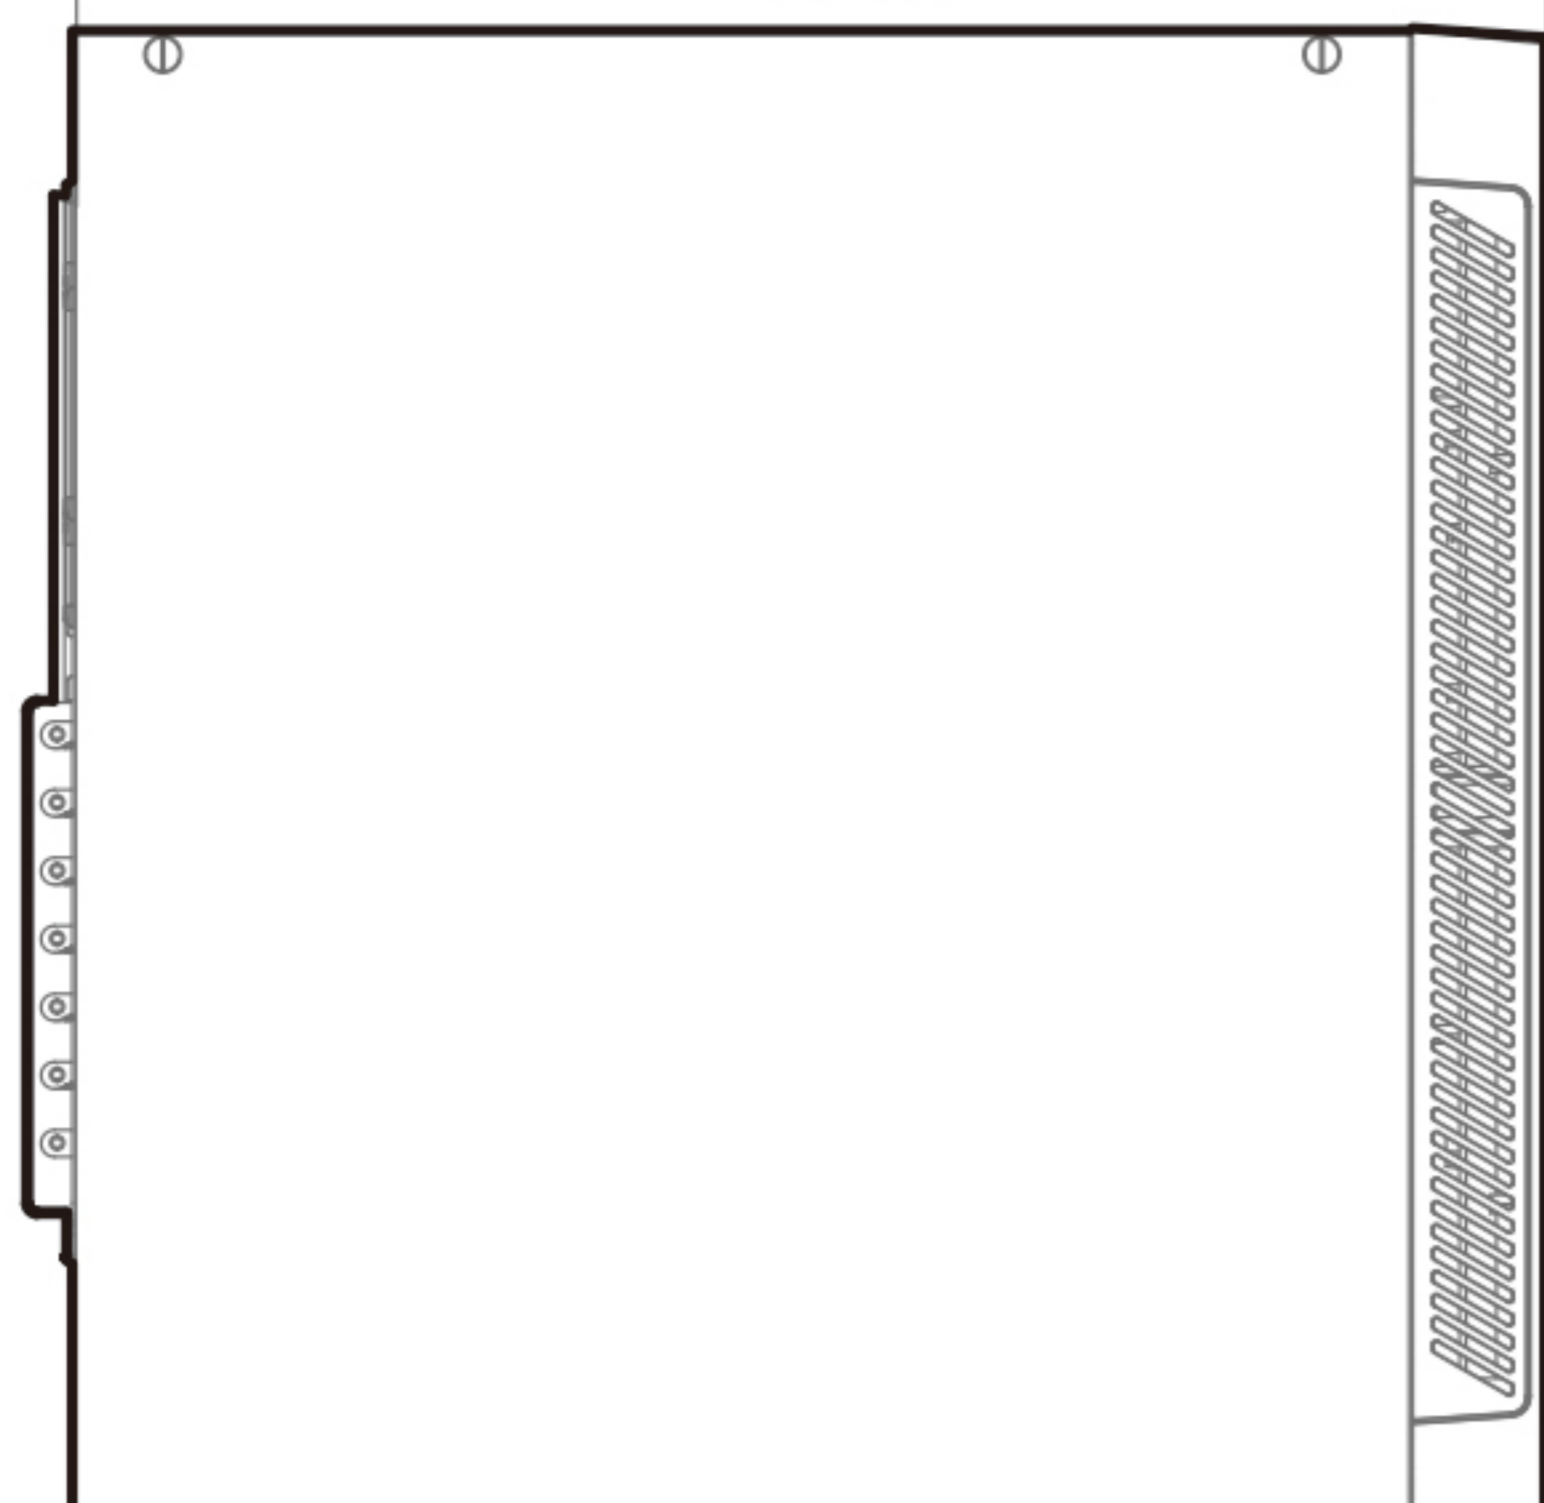

Specifications:		Expansion Slots&HDD Brackets:		Clearance:	
Product Dimensions (LxWxH)	440x210x480mm	Expansion Slots	7	Graphic Card	370mm
Case type	Middle Tower	2.5" Drive Bays	2+2	CPU Cooler	168mm
Materials	ABS+SPCC (Panel thickness: 0.6mm)	3.5" Drive Bays	2	Cable Management	23mm
I/O Panel	USB3.0x1/USB2.0x2/Audio(HD)x1/Micx1			PSU Length	170mm


Cooling Fans Support:

Front	120mmx3
Top	120mmx2/140mmx2
Rear	120mmx1

Liquid Cooler Support:

Front	120/240/360mm radiator
Top	120/140/240/280mm radiator
Rear	120mm radiator


2. Hardware supports

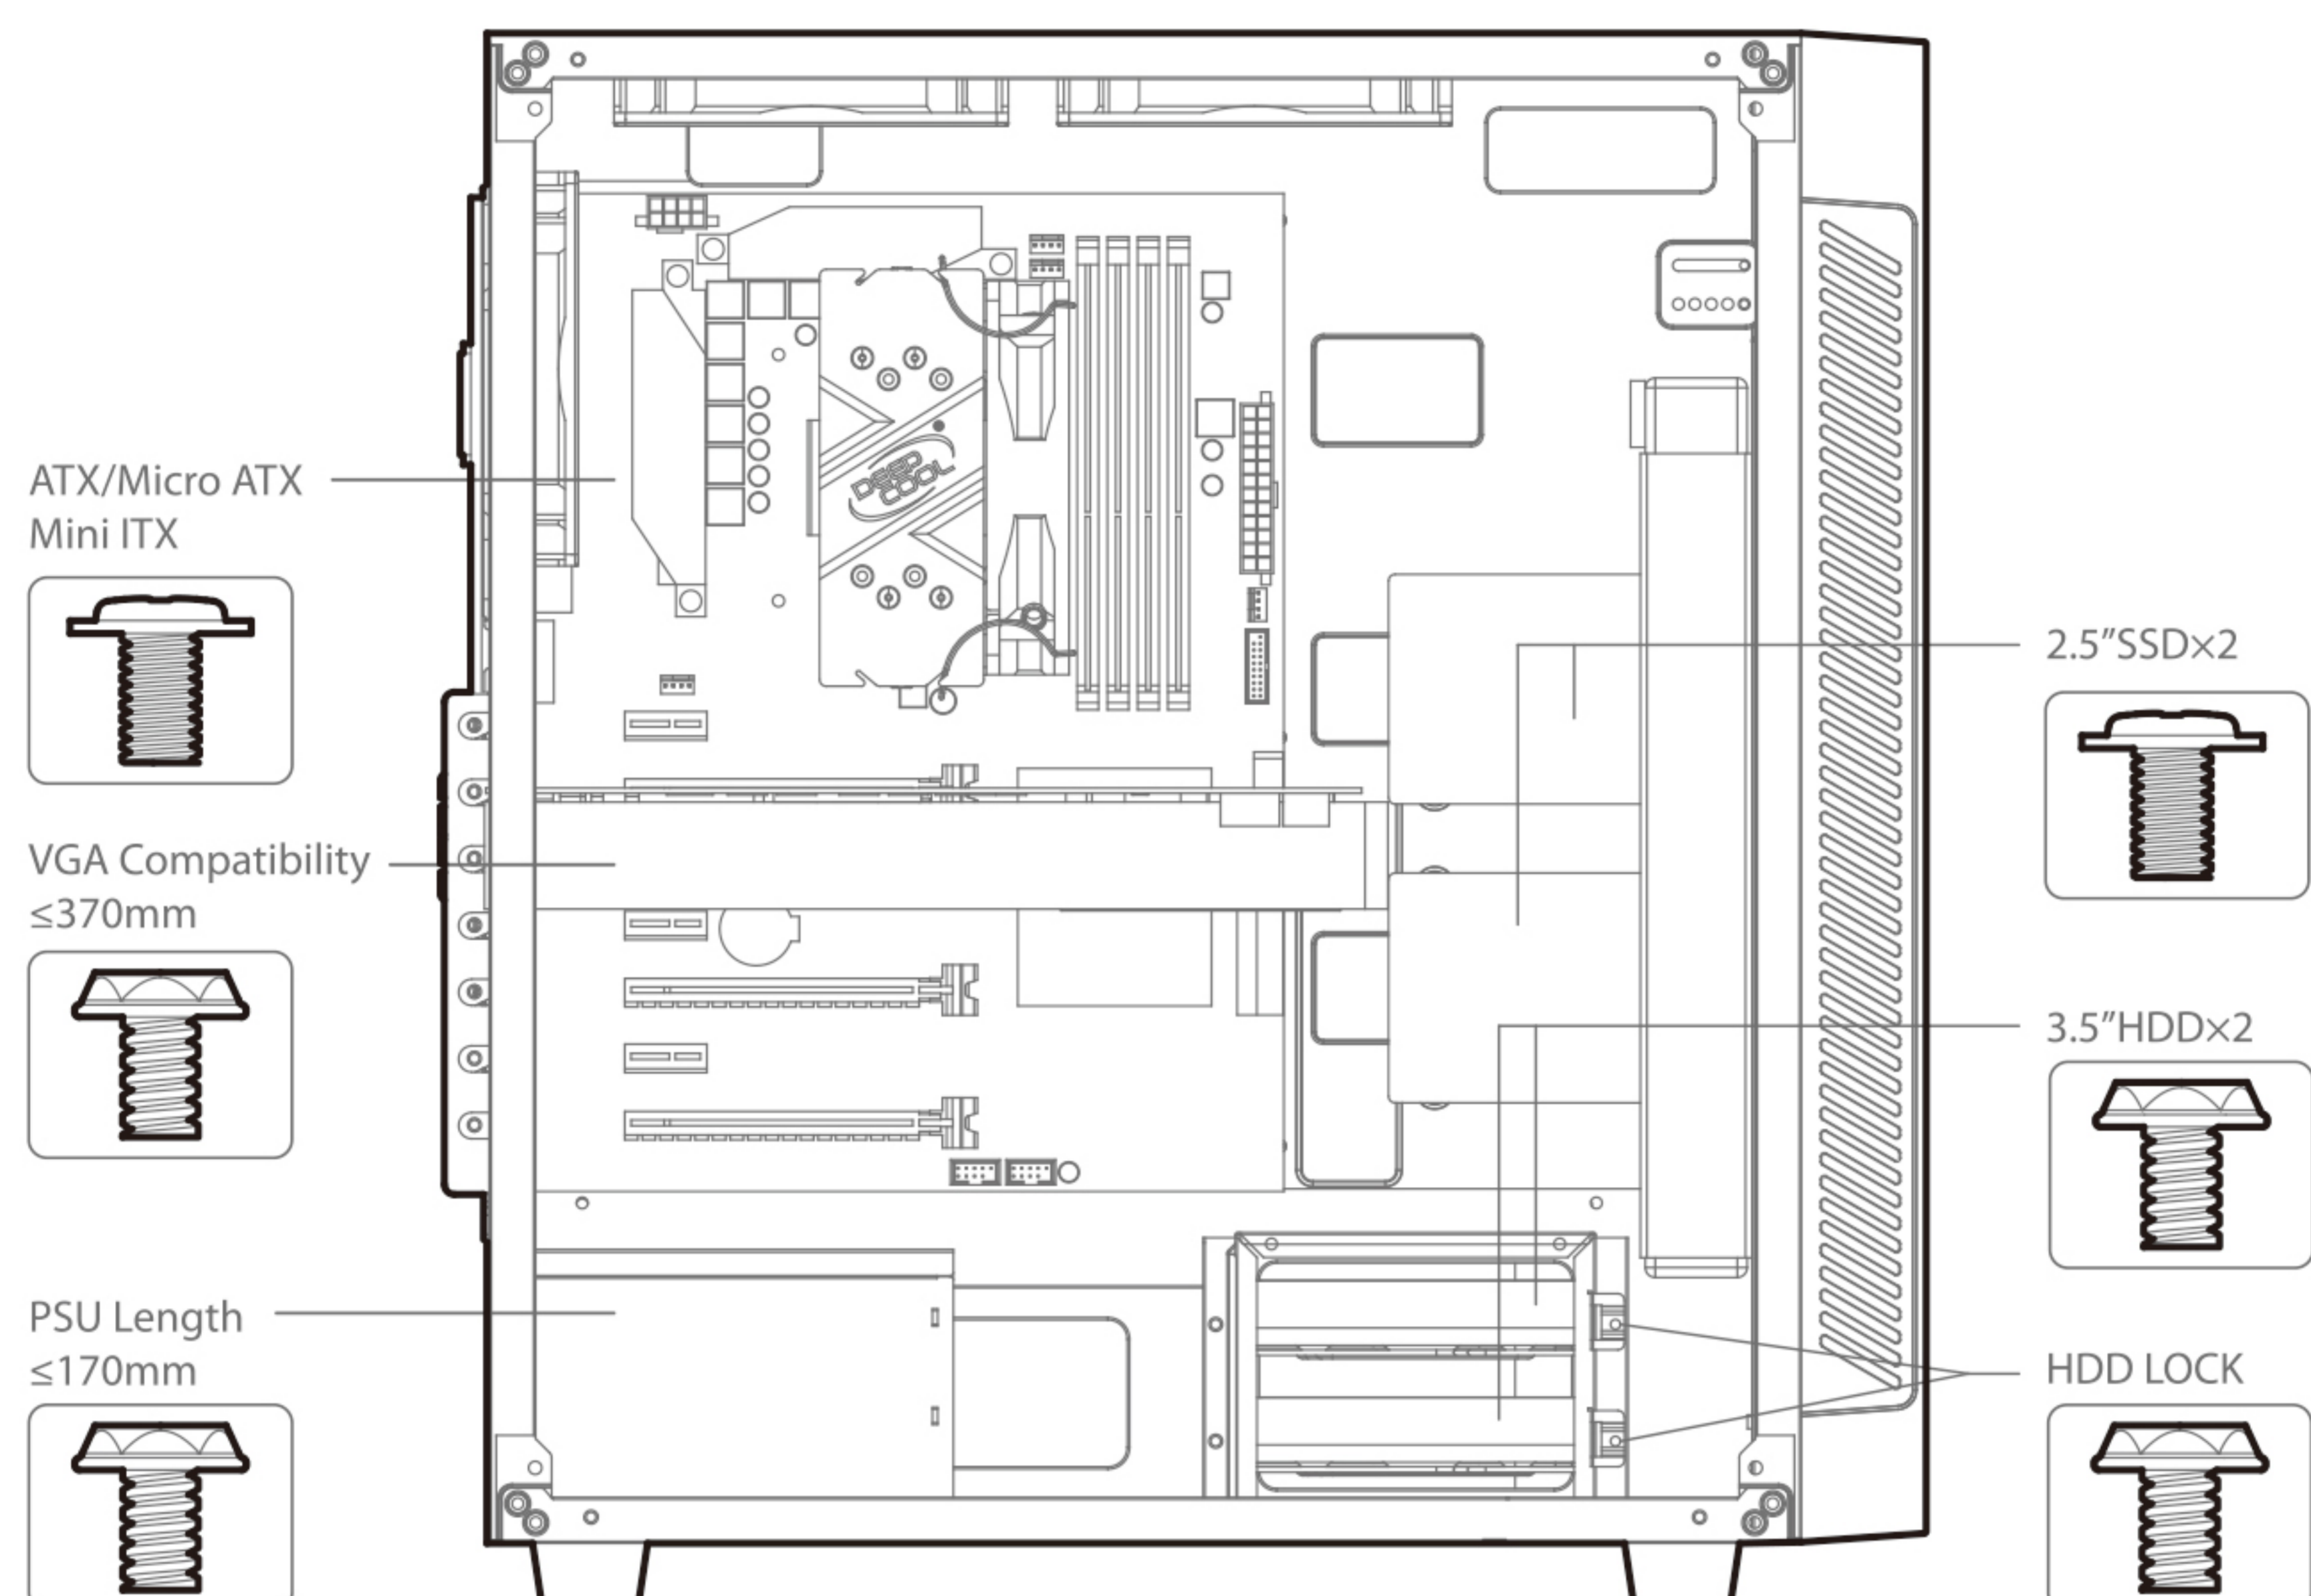

3. Cooling system supports


Top Fans Supports: 120mm fanx2/140mm fanx2 Radiator Supports: 120/140/240/280mm

Rear
Fans Supports:
120mm fanx1
Radiator Supports:
120mm

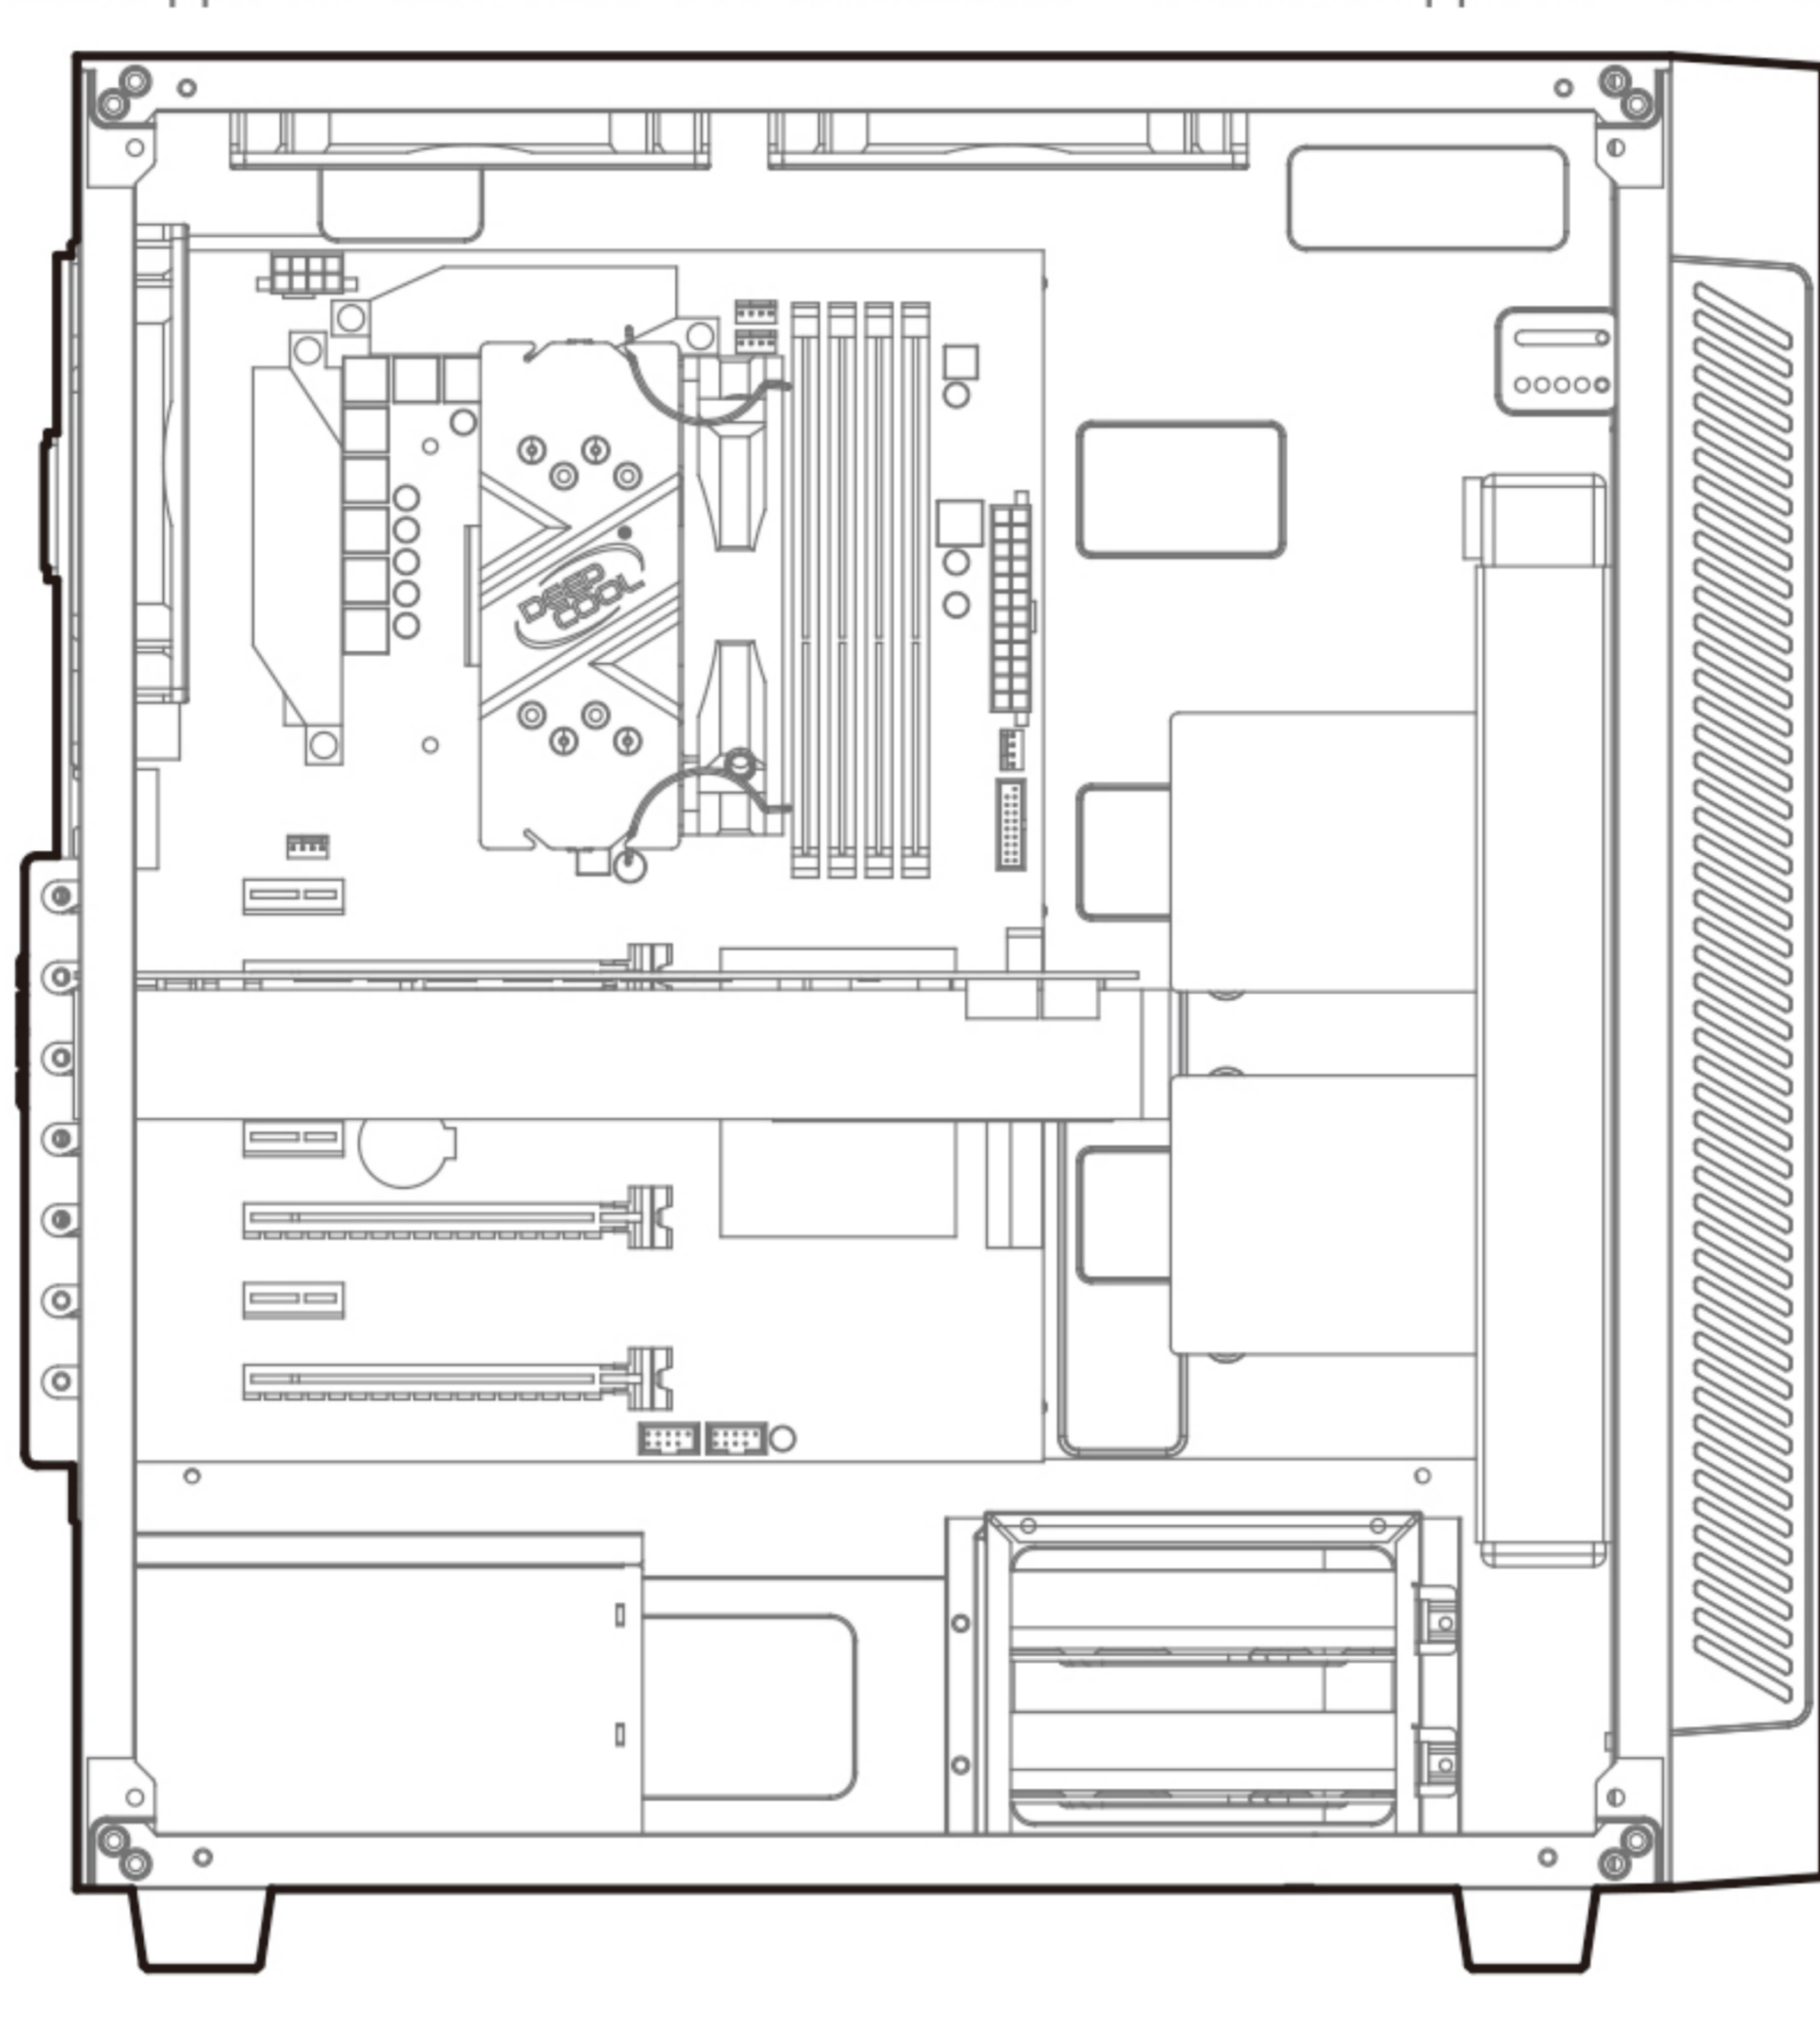


Front
Fans Supports:
120mm fanx3
Radiator Supports:
120/240/360mm

4. RGB light control switch

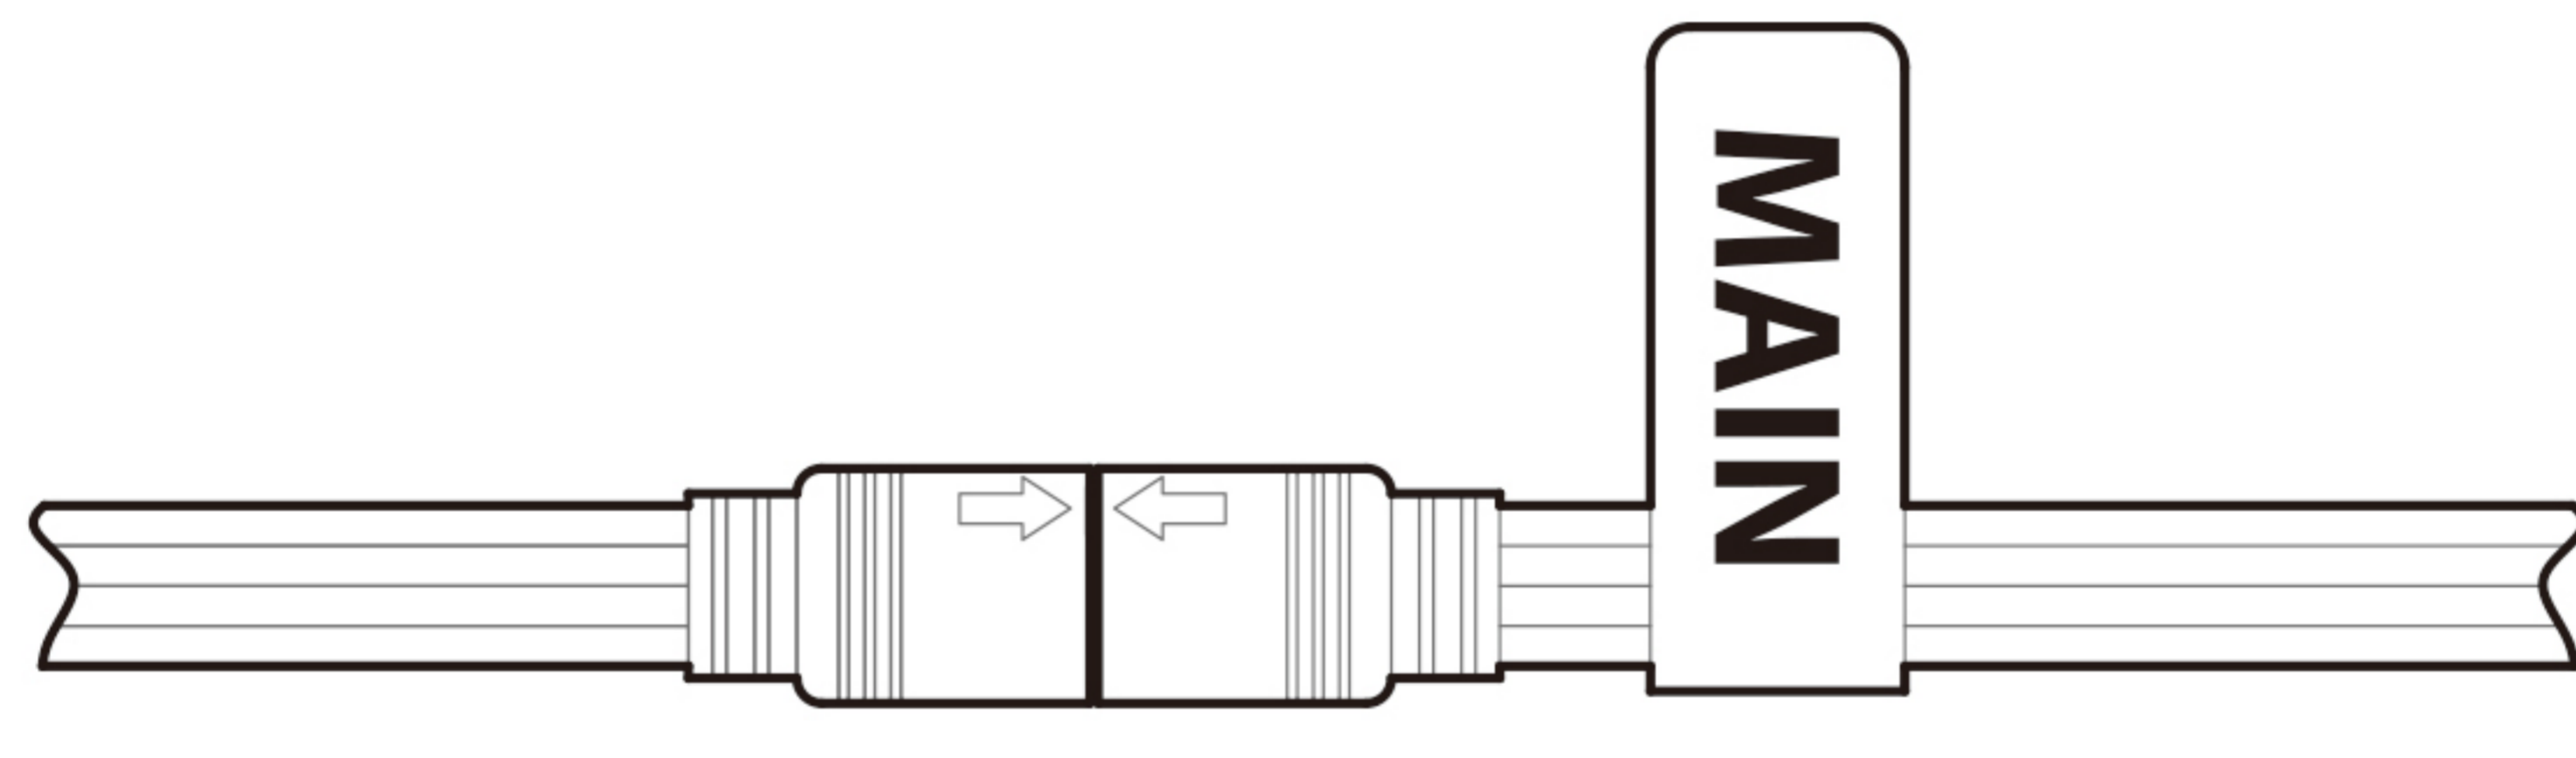


Default: Manual Control

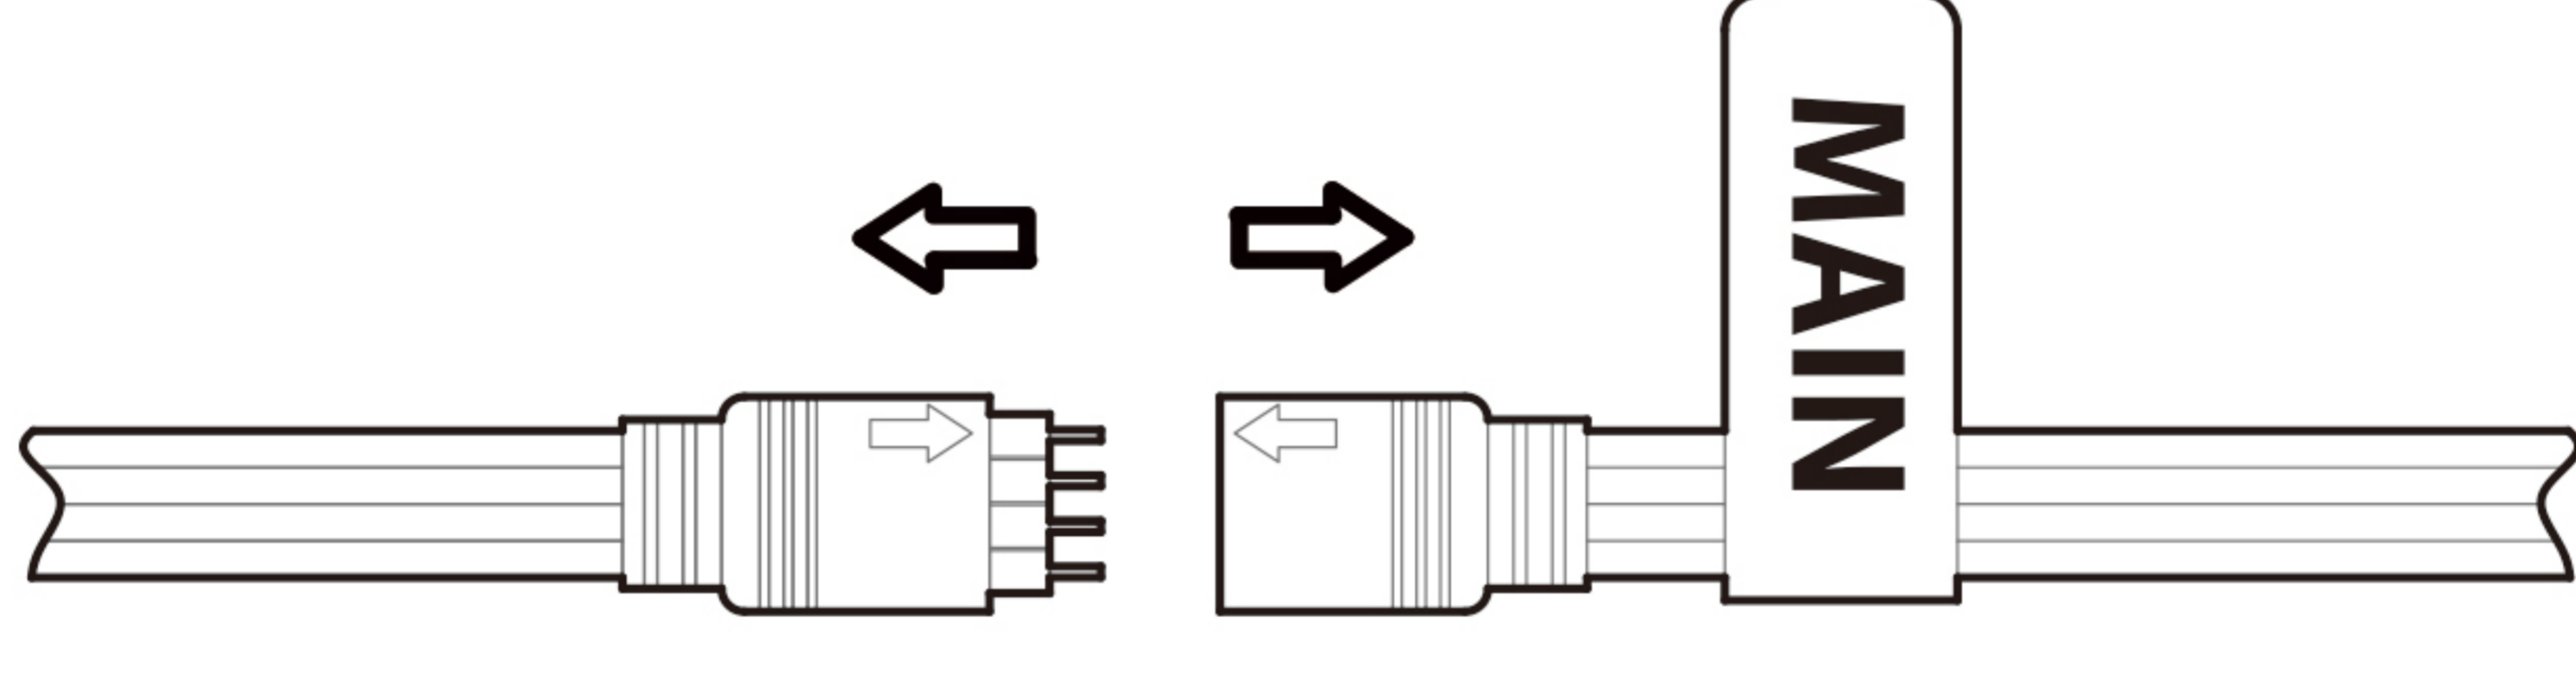

M/B AURA Control: Disconnect and switch the MAIN cable onto M/B

5. RGB_HEADER (AURA +12V,G,R,B)

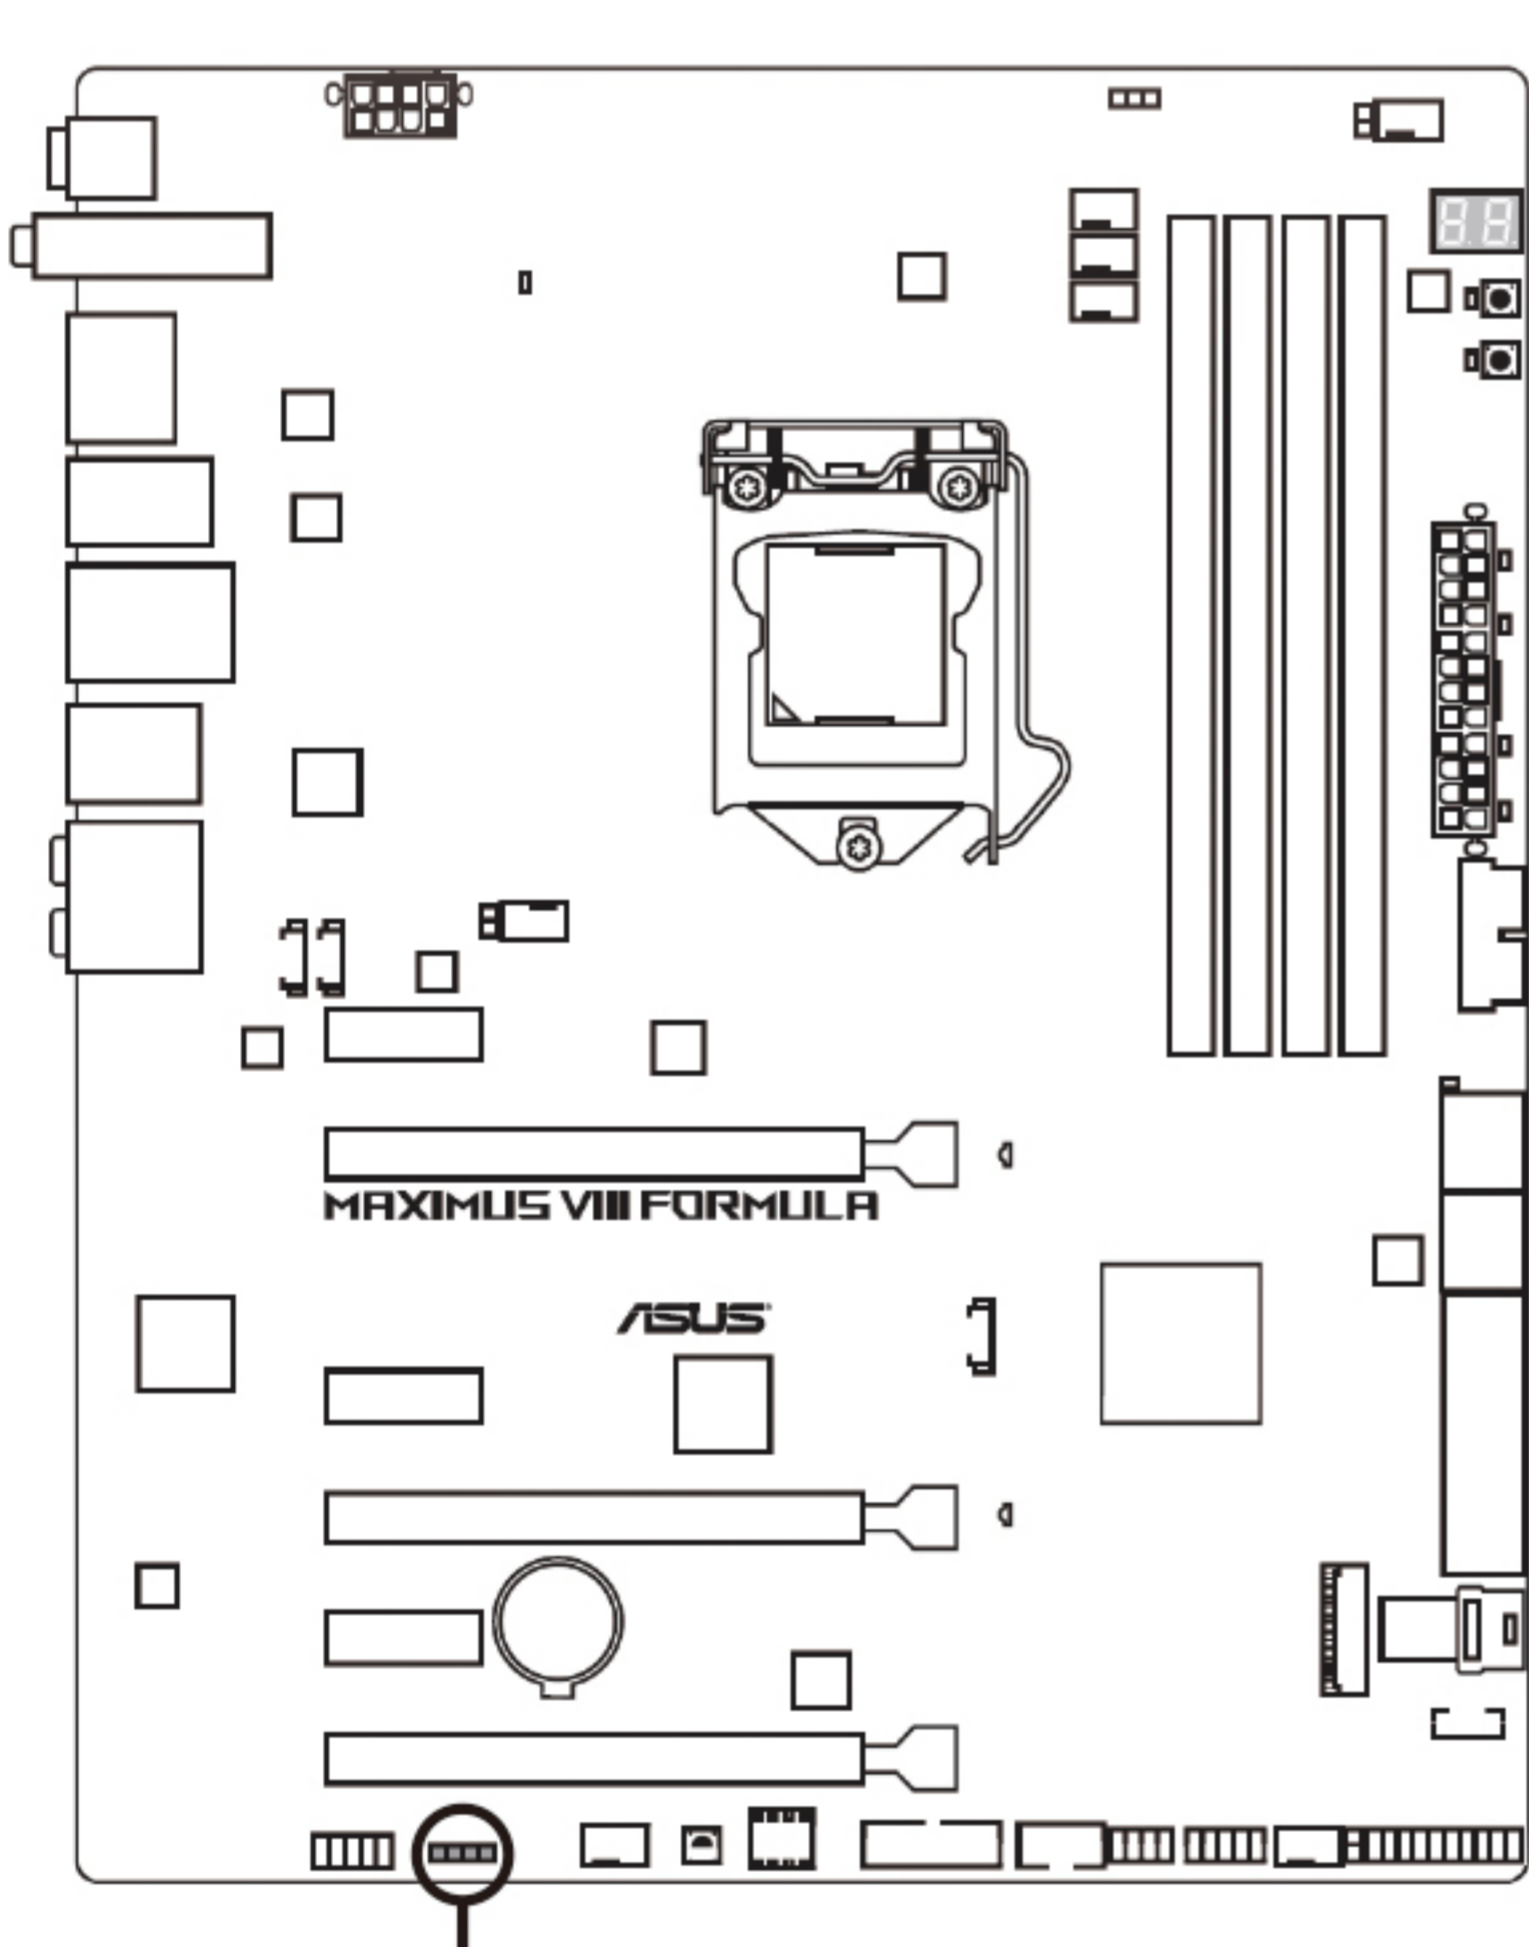


RGB_HEADER1/2/...

12V G R B

ADD_HEADER


+5V D

This cable can be only connected to RGB_HEADER (+12V,G,R,B) on ASUS Motherboards. NOT for ADD_HEADER!

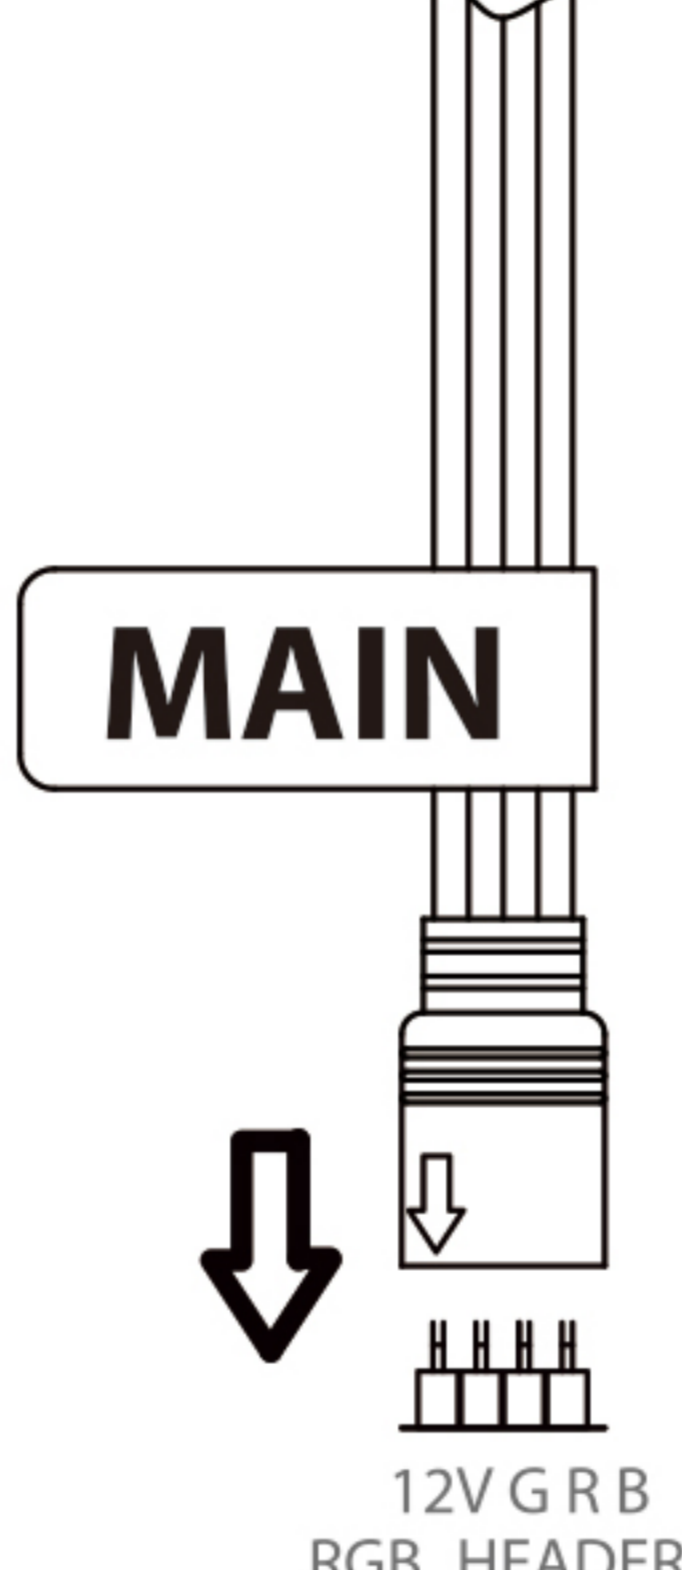

Note: This Arrow ↓ side must be opposite to the pin of 12V 12V

6. Cable Connection & I/O Control

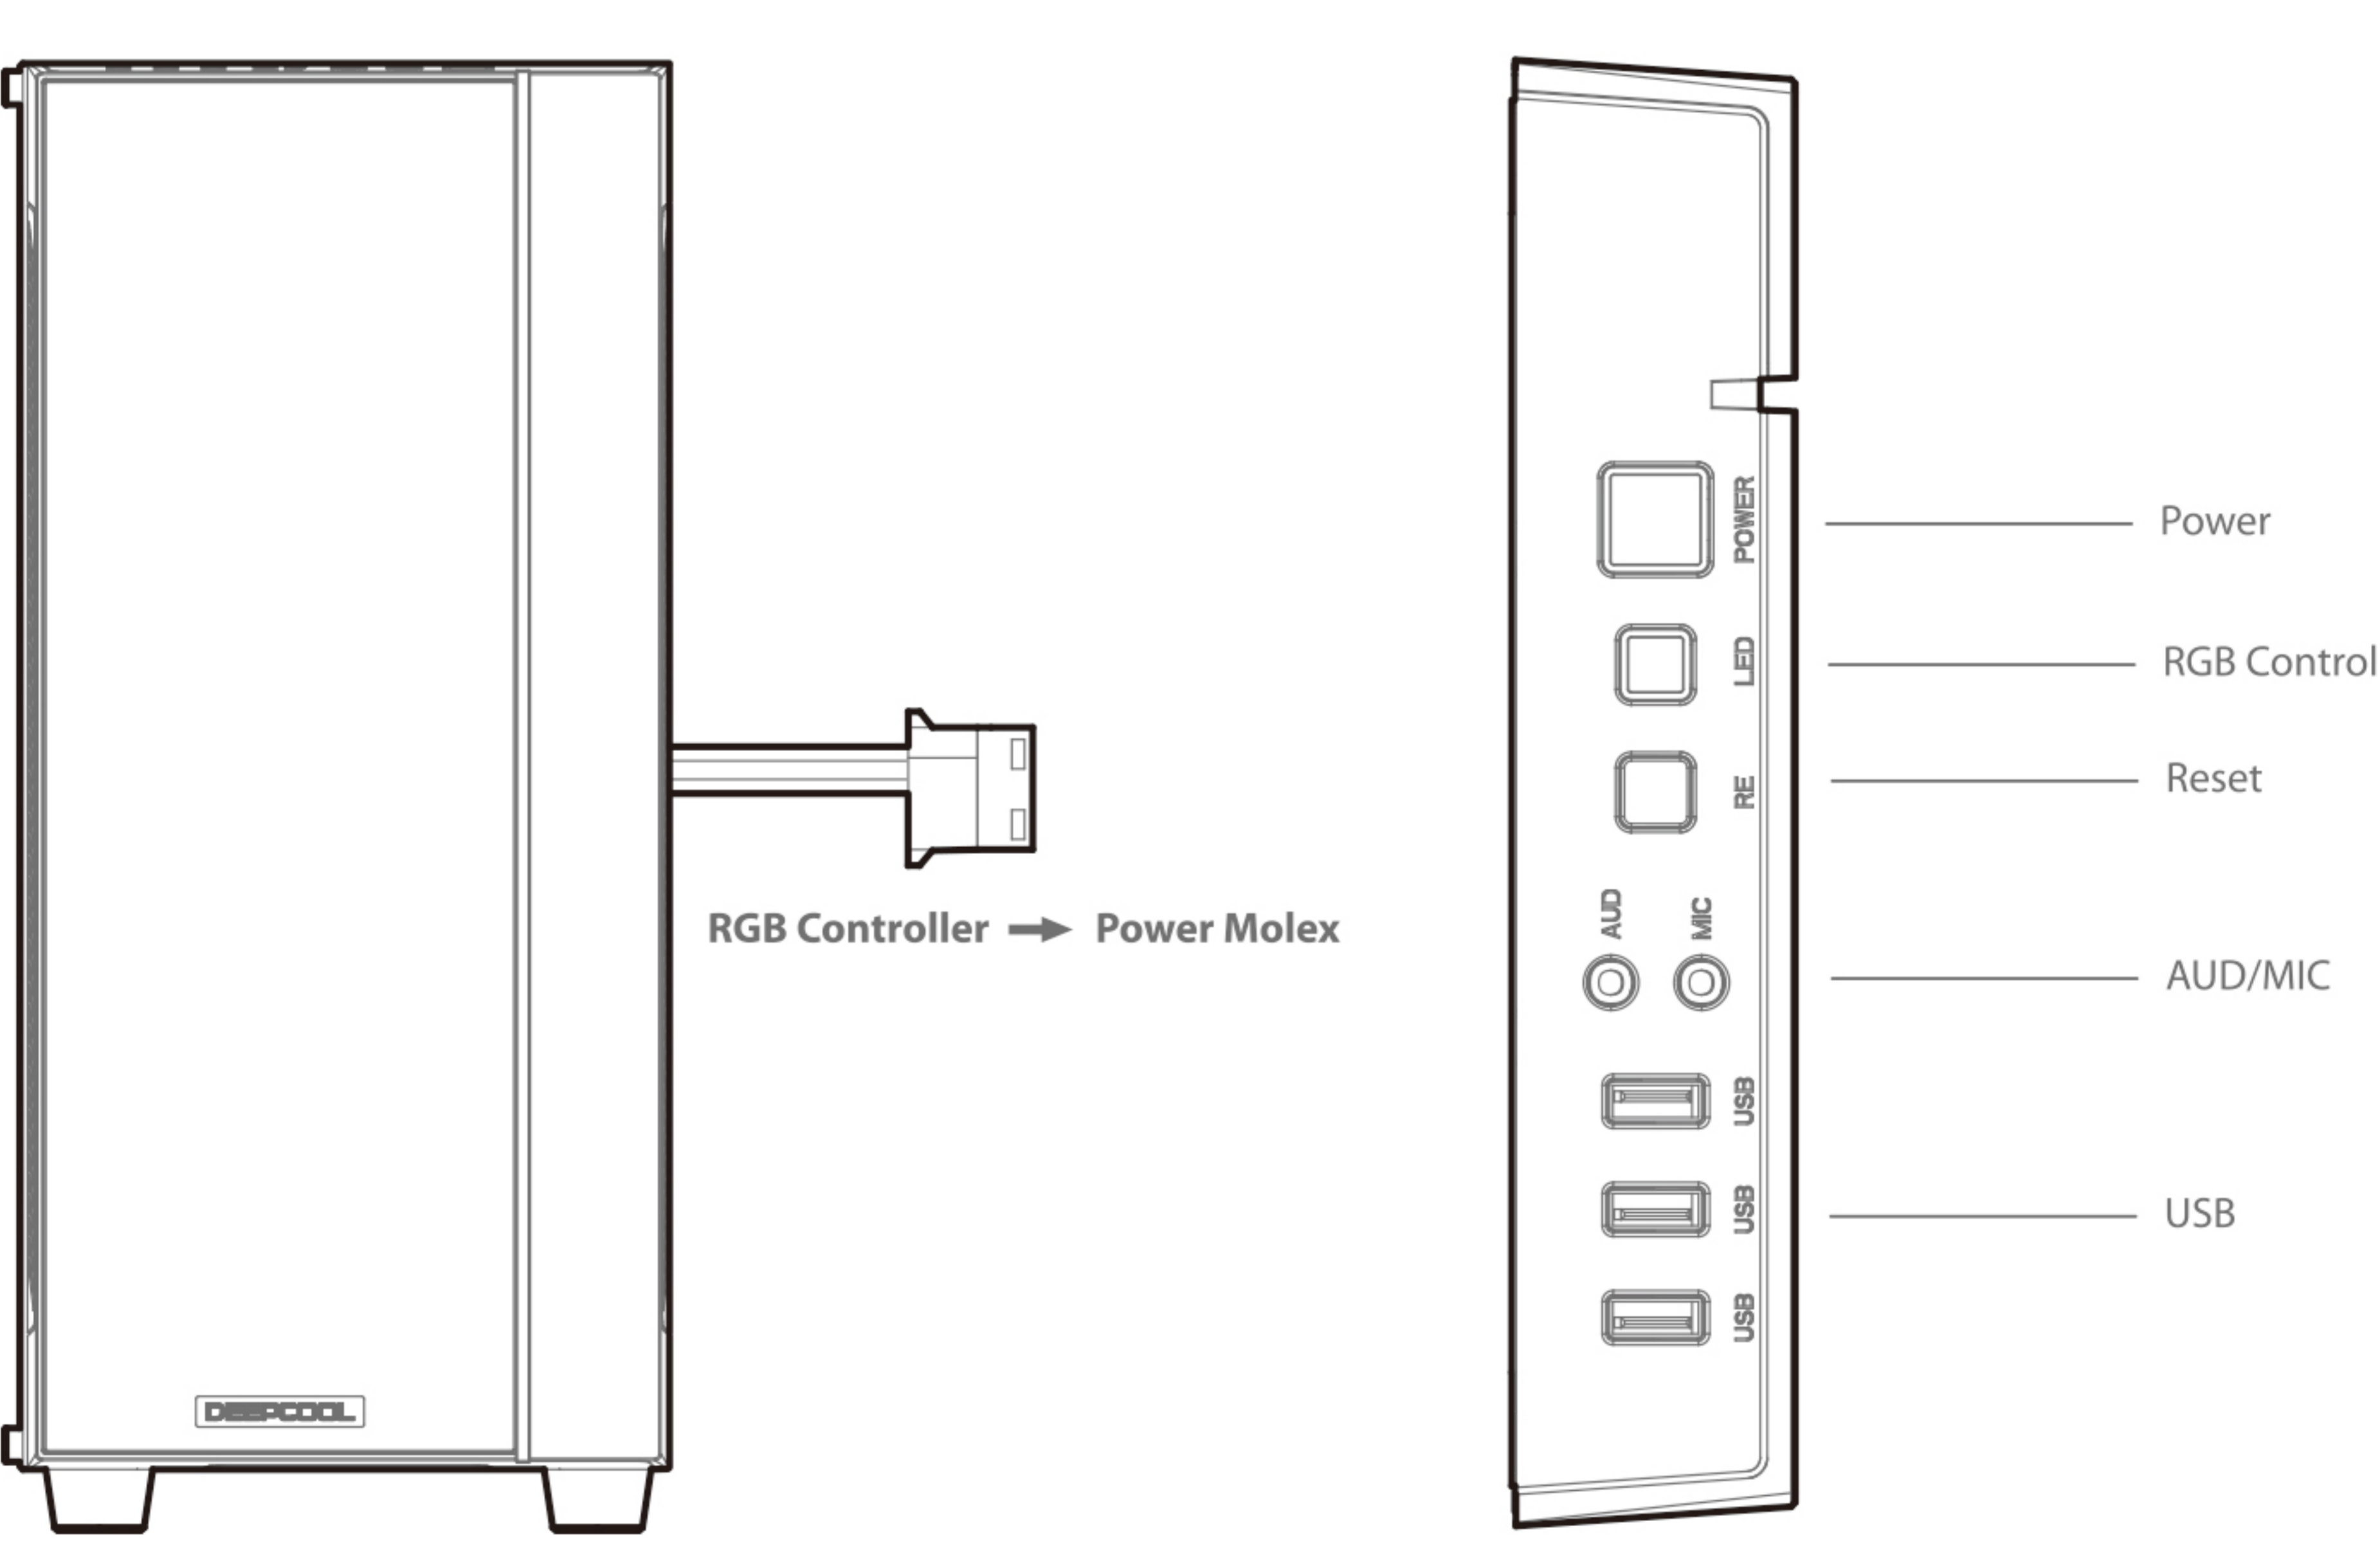

Enjoy Your Cool Life !